




## SYNTHETIC RUBBER WELDING CABLE

BS EN 50525-2-81

100 / 100V  
70°C

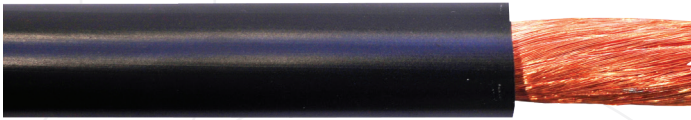

### CONSTRUCTION

<b>Conductor</b>	Finely stranded annealed copper conductor according to IEC 60228, class 5
<b>Insulation</b>	Synthetic Rubber
<b>Insulation colour</b>	Black

### TECHNICAL DATA

<b>Temperature range</b>	-5°C up to 70°C
<b>Nominal voltage</b>	100 / 100V
<b>Test voltage</b>	1kV / 15min
<b>Behaviour in fire</b>	Flame retardant (self-extinguishing) according to IEC 60332-1-2
<b>Absence of harmful substances</b>	RoHS compliant



## SYNTHETIC RUBBER WELDING CABLE

BS EN 50525-2-81

100 / 100V  
70°C

Nominal cross-sectional area of conductors	Maximum diameter of wires in conductor	Thickness of covering Specified value	Mean overall dimensions	
			Lower limit	Upper limit
mm <sup>2</sup>	mm	mm	mm	mm
10	0.21	2.00	7.70	9.70
16	0.21	2.00	8.80	11.00
25	0.21	2.00	10.10	12.70
35	0.21	2.00	11.40	14.20
50	0.21	2.20	13.20	16.50
70	0.21	2.40	15.30	19.20
95	0.21	2.60	17.10	21.40
120	0.51	2.80	19.20	24.00
150	0.51	3.00	21.10	26.40
185	0.51	3.20	23.10	28.90

FAJAR CABLES

## WELDING CABLE

### ELECTRICAL CHARACTERISTICS

#### Current Carrying Capacity

NOMINAL CROSS SECTIONAL AREA	CURRENT RATING FOR SINGLE CYCLE OPERATION OVER A MAXIMUM PERIOD OF 5 MINUTES			
	Amps			
mm <sup>2</sup>	100%	85%	60%	35%
10	100	103	108	122
16	135	145	175	230
25	180	195	230	300
35	225	245	290	375
50	285	305	365	480
70	355	385	460	600
95	430	470	560	730
120	500	540	650	850
150	580	630	750	980
185	665	720	860	1120
240	780	850	975	1250

Ambient air temperature: 25°C

Maximum conductor temperature: 85°C

The above table is based on HD 516 S2:1997

#### Duty Cycle and Current Carrying Capacity:

The current carrying capacity of a welding cable depends on the length of the duty cycle. The duty cycle is the length of time during which a loaded current passes through the cable over an operation period of 5 minutes, expressed as a percentage of that period. For example, if the current is flowing for the whole 5 minutes the duty cycle is 100%, and if the current is flowing for 1 minute the duty cycle is 20%. As conductor temperature varies according to the time in use as well as current, ratings shown are given as a guide.

The permissible loading of the cable for duty cycles other than those shown in the table can be calculated using the following formula:  $I = I100 \times \sqrt{100/F}$

Where:

I : is the maximum permissible loading current for the required duty cycle.

I100 : is the maximum permissible loading current for a duty cycle of 100%.

F : is the required duty cycle calculated as a percentage of the 5 minute operation period.

### DE-RATING FACTORS

#### De-Rating Factor for Ambient Temperature 60°C Thermoplastic or Thermosetting Insulated Cords

AIR TEMPERATURE	25°C	30°C	35°C	40°C	45°C	50°C	55°C
DE-RATING FACTOR	1.0	0.96	0.91	0.87	0.82	0.76	0.71